




# JNCB40-160NA (3600 RPM)

									Impeller type			
									Impeller construction		Closed	
									Sense of rotation		Clockwise from the drive end	
									Outlet width		DN 40	
Flow			Head		Shaft power P2			Speed		rpm	3600	
Min.	Max.	$\eta$ Max.	H(Q=0)	$\eta$ Max.	P2(Q=0)	Max.	$\eta$ Max.	Frequency		Hz	60	
US g.p.m.	US g.p.m.	US g.p.m.	ft	ft	hp	hp	hp					
52.8	220	199	177	142		12.1	11.6					

Performance data based to: Water, pure [100%]; 68°F; 62.3lb/ft<sup>3</sup>; 1.08E-5ft<sup>2</sup>/s

UNI EN ISO 9906:2012 - Grade 3B

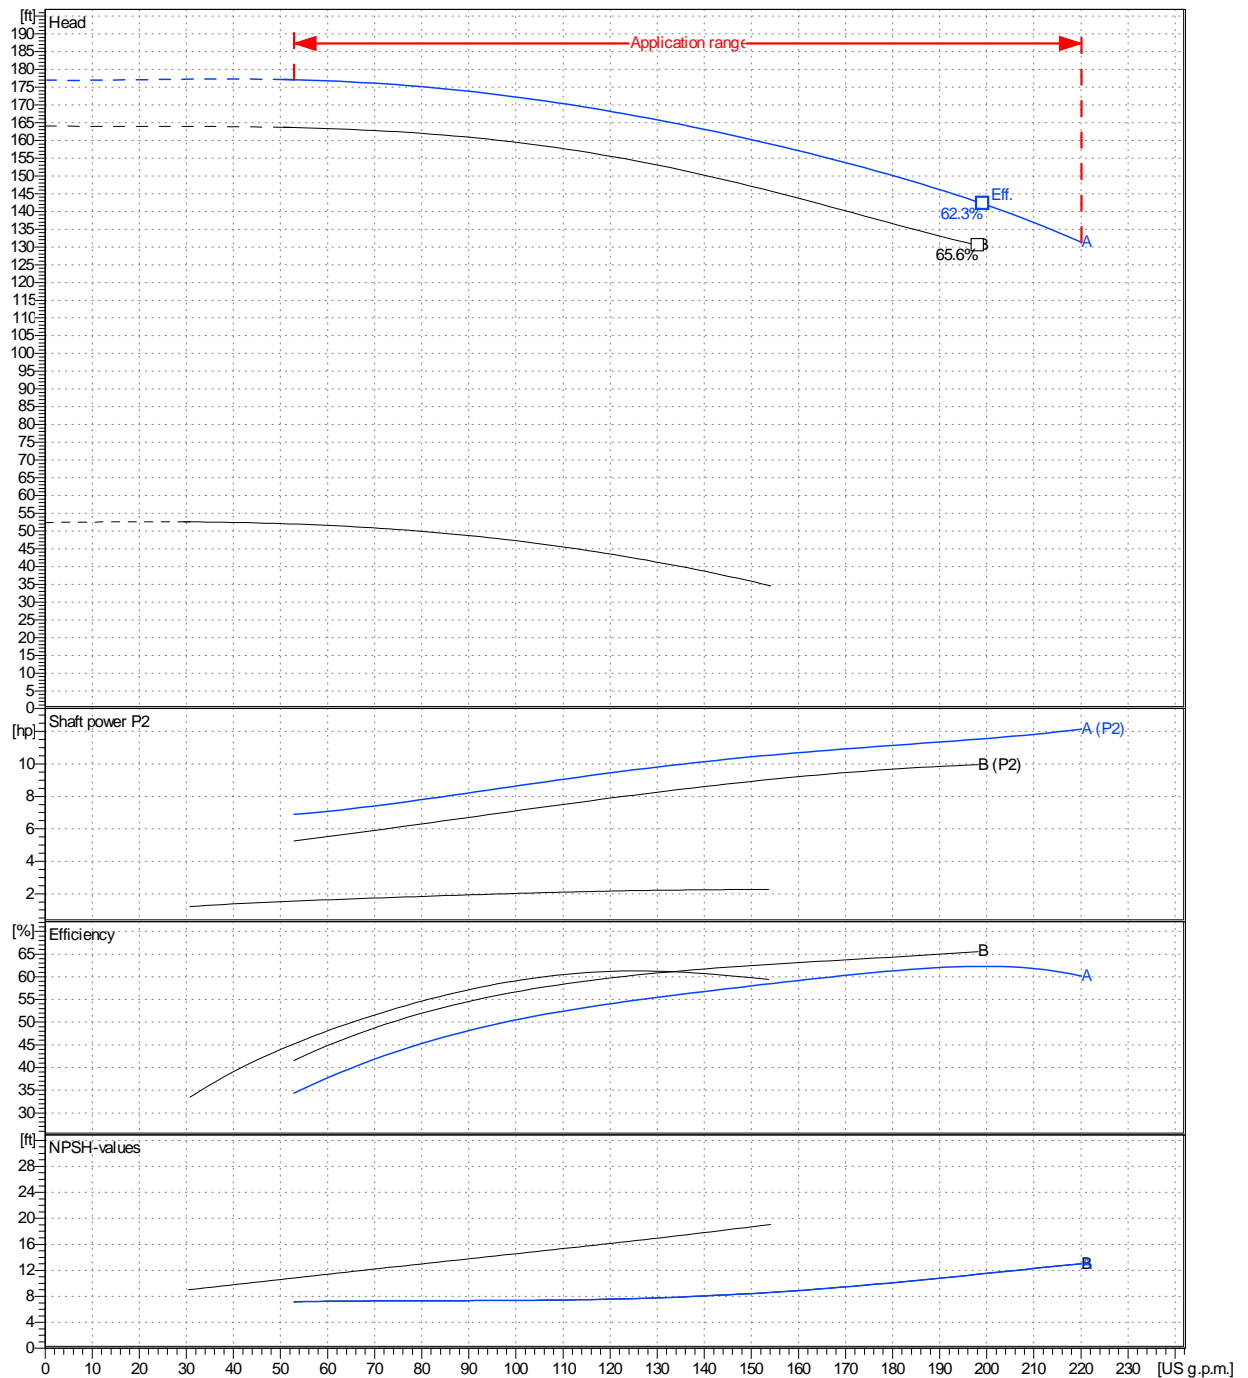

--	--	--	--

# JNCB40-160NA (1800 RPM)

					Impeller construction		Closed			
					Sense of rotation		Clockwise from the drive end			
					Outlet width		DN 40			
Flow			Head		Shaft power P2			Speed	rpm	1800
Min.	Max.	$\eta$ Max.	H(Q=0)	$\eta$ Max.	P2(Q=0)	Max.	$\eta$ Max.	Frequency	Hz	60
US g.p.m.	US g.p.m.	US g.p.m.	ft	ft	hp	hp	hp			
30.8	154	125	52.4	42.3		2.27	2.19			

Performance data based to: Water, pure [100%]; 68°F; 62.3lb/ft³; 1.08E-5ft²/s

UNI EN ISO 9906:2012 - Grade 3B

