


Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Receiver	From

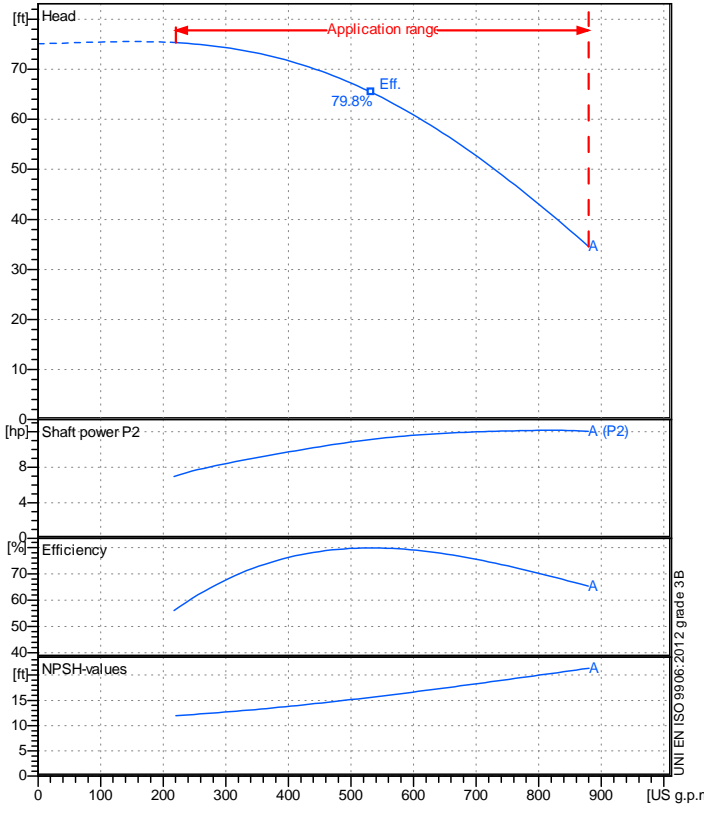

Operating data specification

Nominal flow	US g.p.m. 0
Nominal head	ft 0
Static head	ft 0
NPSH - v value of plant	ft 0
Inlet pressure	psi 1.42
Fluid	Water, pure
Operating temperature t A	°F 68
Density at t A	lb/ft³ 62.32
Kin. viscosity at t A	ft²/s 1.082E-5


Pump		6MG4-4P 80-200A	
Pump name	6MG4-4P 80-200A		
Size	100/80/200		
Design			
Speed rpm	1800	No of stages	1
Impeller type			
Flow	Nominal	US g.p.m.	
	Max-	US g.p.m. 880	
	Min-	US g.p.m. 220	
Head	Nominal	ft	
	Max-	ft 75.3	
	Min-	ft 34.6	
Head H(Q=0)	ft 75.1		
NPSH 3%	ft		
Max. working pressure	psi 32.5		
Shaft power	hp		
Efficiency	%		
Max absorbed power	hp 12.164		

Materials Pump

Shaft	Stainless steel AISI 431 (1.4057)		
Impeller	Cast iron EN-GJL-250		
Pump body	Cast iron EN-GJL-250		
Seal disc	Cast iron EN-GJL-250		
Gasket	Natural fiber		
Mechanical seal	BVEG (Grafite/Ossido Allumina/EPDM)		

Motor		Frame size	132L	
Manufacturer / Type		SAER	MEC132L-4P-9.2	
Rated power	hp	12.337	Efficiency 4/4	86 %
Electric current	A	33/16.5 A	Speed	rpm 1800
Electric voltage	V	230/460V	3~	Hz 60
Starting mode	Unknown			
Degree of protection	IP 55		Insulation class	F

Dimensions in inch

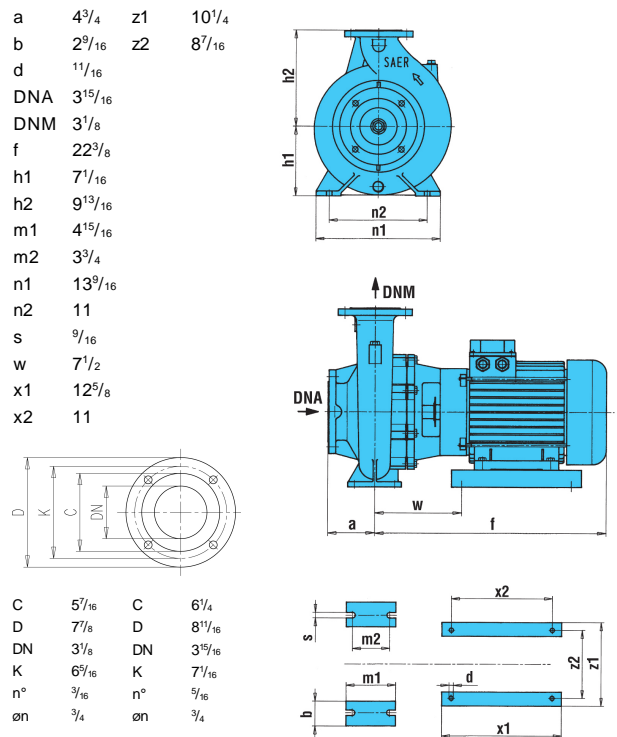


Remarks:		Project ID	Created by	Created on	Last update
Project				2022-09-26	

Receiver	From


Operating area	Flow	Head	Impeller type
Operating data specification	0 US g.p.m.	0 ft	Impeller construction
Pump data	US g.p.m.	ft	Sense of rotation
			Clockwise f from the drive end
			Outlet width
			DN 80

Performance data based to: Water, pure [100%]; 68°F; 62.3lb/ft³; 1.08E-5ft²/s UNI EN ISO 9906:2012 - Grade 3B

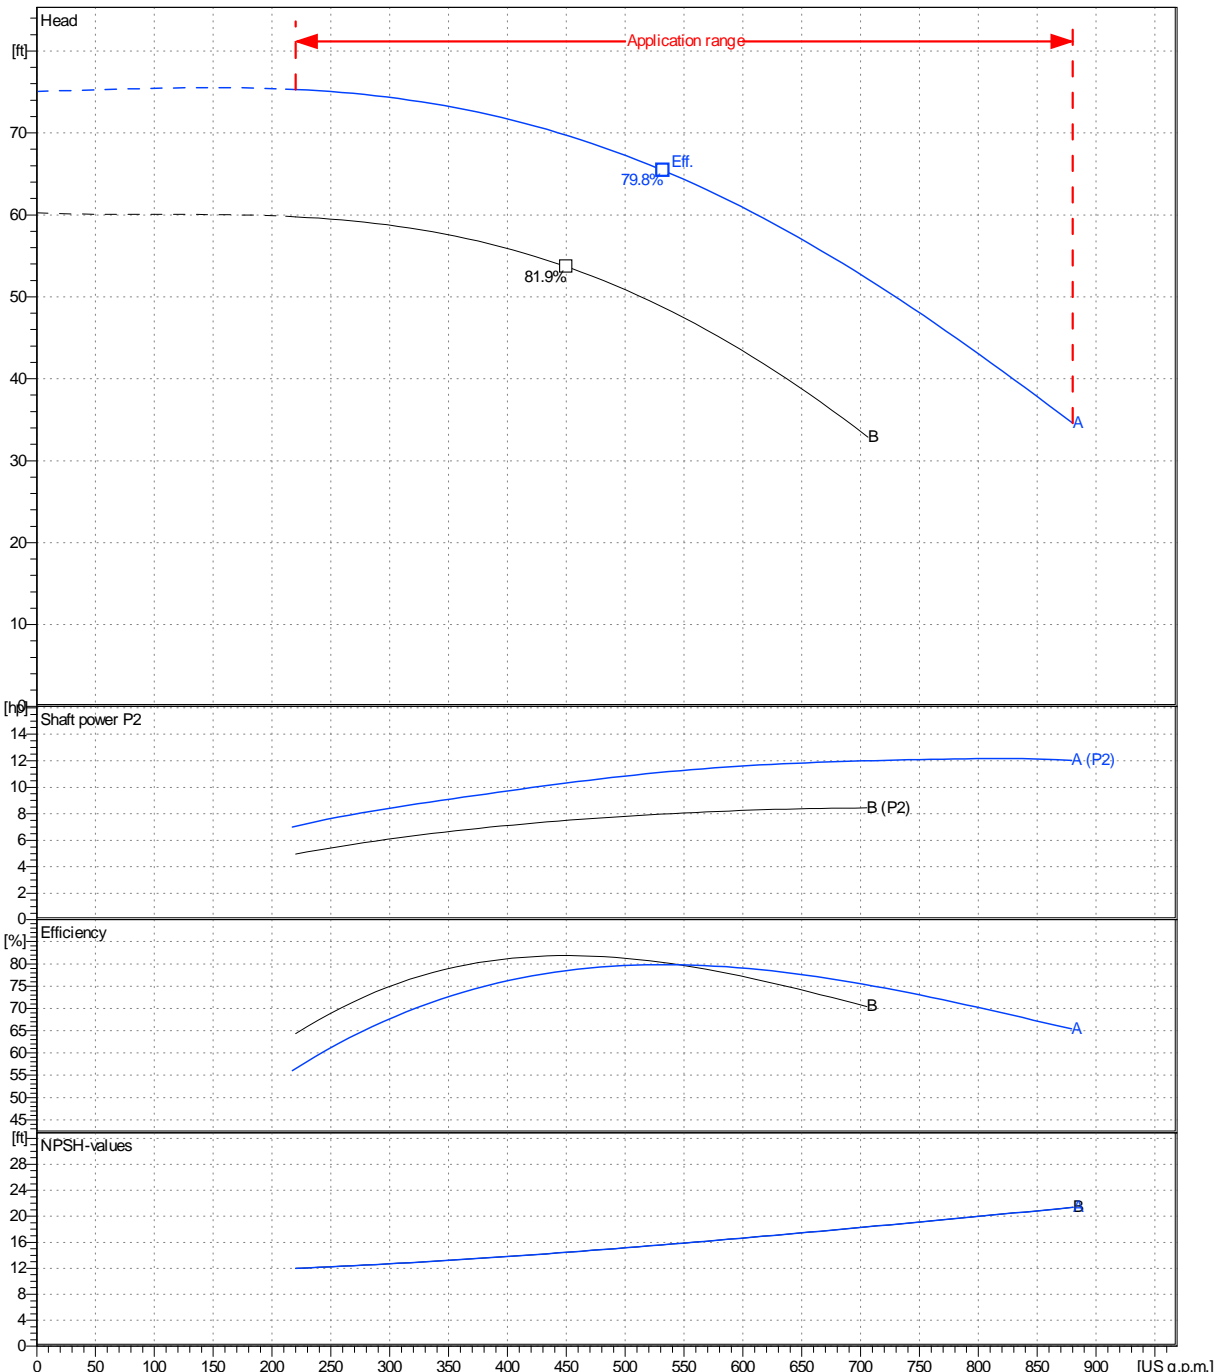

Project	Project ID	Created by	Created on	Last update
			2022-09-26	

Company name
Respons. Department
Person in charge
Phone number
Fax no
E-mail address

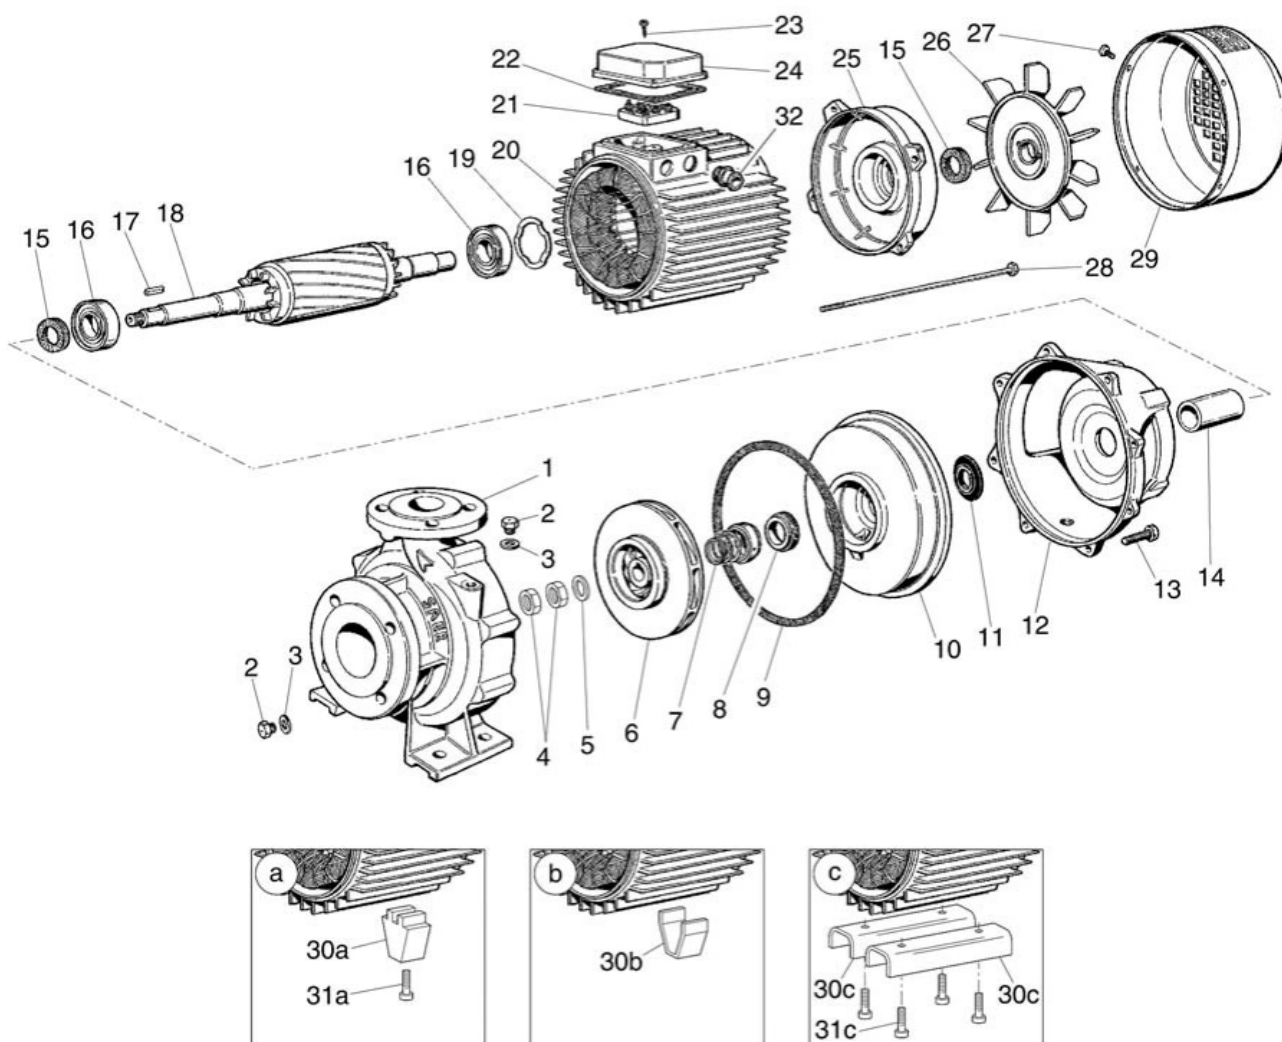

Project

Project ID

Created by

Created on
2022-09-26

Last update