


Gol Pumps Thechnology		DATA SHEET		Gol Pumps Technology INC www.golpumps.com www.golpumps.us Email : info@golpumps.com		
		Dewatering Pump GVA				
		GVA - 370				
Pump Data				GV/GVA 370(GVA370V) 		
Brand : Gol Pump						
Model : GVA - 370						
Head Rate : 16 FEET	Flow Rate: 26 GPM					
Head Max: 26 FEET	Flow Min : 5 GPM					
Head Min: 3 FEET	Flow Max: 53 GPM					
RPM : 3550						
Normal Power P1 : 0.5 HP						
Fluid: Water						
Fluid Temperture: at about 25 °C.						
Density: water 997 kg/m³						
Fluid Viscosity: 8.90 × 10 ⁻⁴ Pa-s						
With Float switch: yes						
Self Priming: Submersible						
Delivery size: 1.5" NPT						
Suction size: With Strainer						
Made in : TAIWAN						
Motor Data						
Power P2:						
Power P1: 0.37 KW						
Phase (PH): 1						
Rate Voltage : 115 V						
Capacitor Need : *		μF				
Ferequency : 60 Hz						
Rated Speed (rpm): 3550 rpm						
Current (A): 4A						
Cos φ : 0.95						
Degree of Protection (IP): IP 68						
Safety Protection Included: Overload inside						
length of Cable : 0.75 × 4		mm2×m				
Kind of Plug : 115V -PLUG						
Ambient Temp : 40°C = 104°F						
Other Pump Data						
Impeller Size (mm) : *						
Pressuer Rating : PN 16						
Min. Fluid Temp : 10°C = 50°F						
Max. Fluid Temp : 40°C = 104°F						
Ambient Temp : 40°C = 104°F						
Humidity % : 100%						
Special Specification						
Installation status : Ver						
Variable frequency : NONE						
Solid Passage 40 × 15		mm				
Materials						
Pump Body : Plastic						
Support: Plastic						
Impeller: Plastic						
Mechanical Seal: Ceramic - Carbon						
Rubber: Synthetic						
Pump Shaft: Stainless steel						
Strainer: Plastic						
outer cover: Plastic						
Motor: Stainless steel						
Shaft Seal		Weight : 6 Kg		Applicant:		
Type: * <th colspan="2">Standard Approve</th> <th colspan="2">Dimention in mm</th>	Standard Approve		Dimention in mm			
Stationary Part: Ceramic	CSA		Lifting Sewage Water		A 228	
Rotating Part: Carbon			from Cesspools Transfer		B 129	
Elastomer: NBR					C 159	
Pump and Motor specification optional		UL		Clean or Slightly Dirty Water		D 117
With Booster System: None				E 106		
With Complack: None				F 320		
Special Material: None	CE		from The Well or			
Specail Voltage: None			The Basement			
Protection system required		CE				
External Flout switch: NO						
Minimum Starter: Starter SWT						

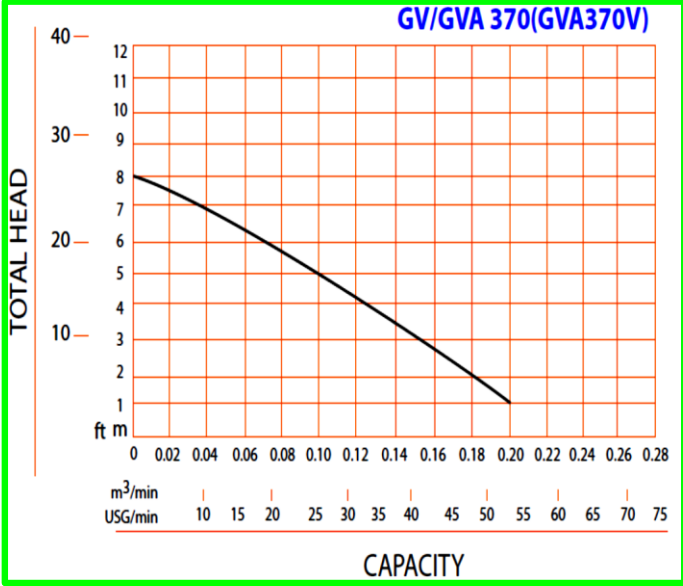